Renewing procedure of Daylight Saving Timetable

Caution

The new Daylight Saving Time is introduced in U.S.A. and Canada from March 2007.

The U.S.A. and Canada customers should apply this renewing procedure on your products.

For the customers other than U.S.A. and Canada should check your daylight saving time and if necessary apply this renewing procedure.

If not, do not apply this procedure on your product.

1. Update firmware

In order to upgrade a firmware of ND300 series, please refer to The Firmware Loading Instruction.

Latest firmware is,

WJ-ND300: Ver4.10

WJ-ND300A: Ver4.10

2. Renew Daylight Saving Timetable

Following is a procedure to change the new Daylight Saving Time starting in 2007.

1. Open the Internet Explorer.
2. Type the following URL to the address bar.
   http://192.168.0.250/cgi-bin/nd300maintenance_initsummertime.cgi

3. It takes several time to complete the renewing.
   After completed the renewing, “200 OK” will be shown in Internet Explorer as Fig-1.

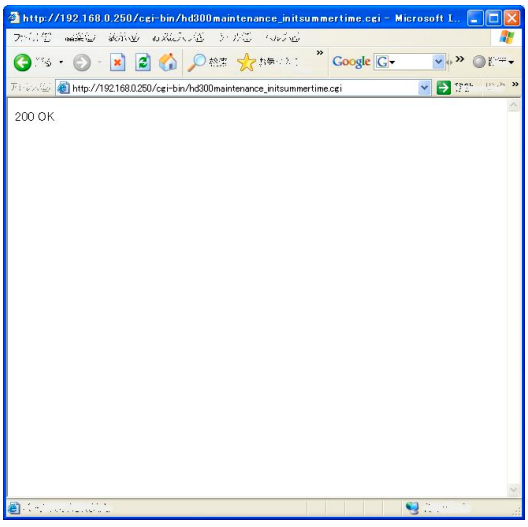

Fig-1

3. Confirm the new Daylight Saving Time setup

1. Open the Internet Explorer.
2. Type the following IP address to the address bar.
   http://192.168.0.250
3. Top window will be shown as Fig-2

Fig-2

4. Click [Setup] Tab to show setup menu. Select [Advanced Setup Menu] and click [Time & Date Setup]

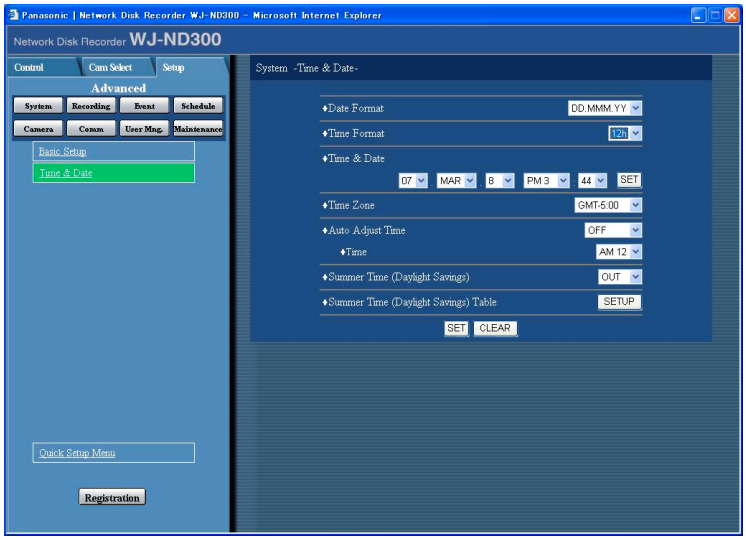

Fig-3

5. Click [SETUP] button of “Summer Time (Daylight Saving) Table” item.
   Daylight Saving Time Table will be shown as Fig-4 and confirm the new time table.

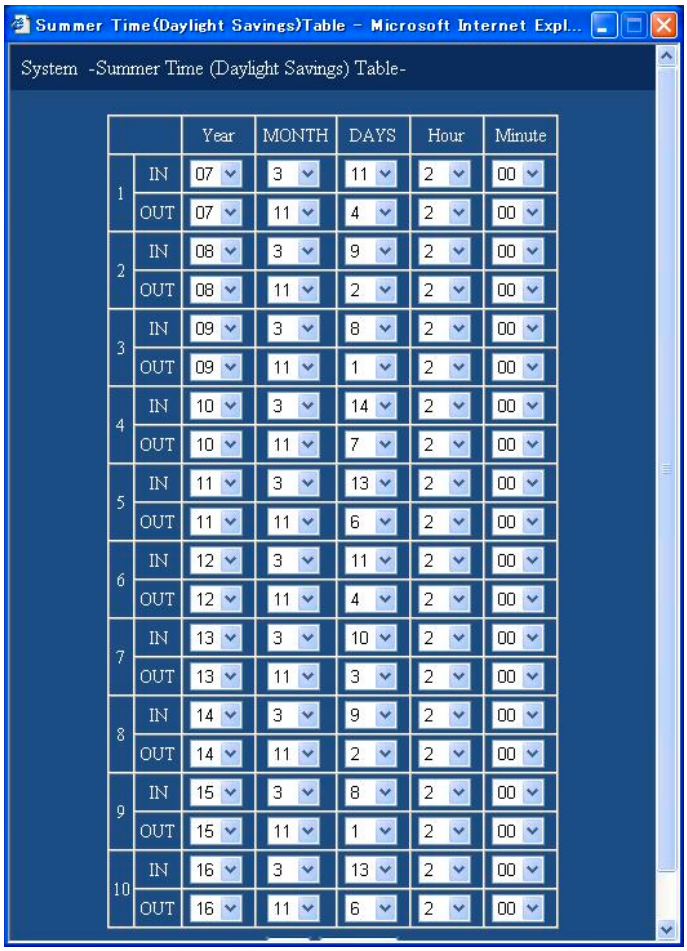

		Year	MONTH	DAYS	Hour	Minute
1	IN	07	3	11	2	00
	OUT	07	11	4	2	00
2	IN	08	3	9	2	00
	OUT	08	11	2	2	00
3	IN	09	3	8	2	00
	OUT	09	11	1	2	00
4	IN	10	3	14	2	00
	OUT	10	11	7	2	00
5	IN	11	3	13	2	00
	OUT	11	11	6	2	00
6	IN	12	3	11	2	00
	OUT	12	11	4	2	00
7	IN	13	3	10	2	00
	OUT	13	11	3	2	00
8	IN	14	3	9	2	00
	OUT	14	11	2	2	00
9	IN	15	3	8	2	00
	OUT	15	11	1	2	00
10	IN	16	3	13	2	00
	OUT	16	11	6	2	00

Fig-4

End of procedure